



## Commentary


Molecular Dynamics at the  
CheckpointBernhard Roither<sup>1</sup>, Chris Oostenbrink<sup>2</sup>, Georg Pfeiler<sup>3</sup>, Heinz Koelbl<sup>3</sup>  
and Wolfgang Schreiner<sup>1\*</sup>

## Abstract

Computational molecular dynamics and by big data analysis disclose molecular movement patterns relevant for drug development and function. Atoms in the contact zones of the PD-1 receptor move differently depending on the binding partner: the natural ligand, PD-L1, or the checkpoint inhibitors nivolumab and pembrolizumab, respectively. Computational analysis was performed by an interdisciplinary team from MedUni Vienna and the University of Natural Resources, Vienna. The natural ligand, PD-L1, not only binds but also activates PD-1, thereby inducing T-cell apoptosis. Cancer cells may, by expressing PD-L1, halt natural immune attack and thus survive. Checkpoint inhibitors are designed to just bind to PD-1, but without activating it. This functional difference is reflected by molecular movements analyzed in the papers by Roither being outlined here.

## The Method of Molecular Dynamics

Molecular dynamics is a computational technique to compute atomic movements similar to a planetary system – but for thousands of atoms rather than nine planets. Atomic positions of all molecules (PD-1, PD-L1, nivolumab, pembrolizumab) are taken from the Protein Data Bank (PDB) [1-4] (Figure 1). Given positions, distances and forces between atoms are computed [5]. Atomic velocities are assigned randomly, according to physiological temperature. The flight trajectories are then computed along a very short interval of time ( $2 \times 10^{-15}$  sec), yielding the next configuration, i.e. new positions, distances, forces and velocities. The next step of simulation may follow [6]. The system can be watched just like in a movie. At intervals, positions are stored and represent a 'trajectory' for subsequent evaluation.

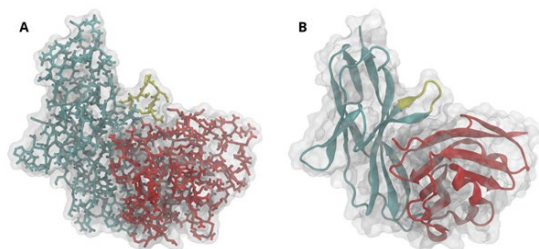

**Figure 1:** PD-1<sub>PD-L1</sub>: PD-1 together with its natural ligand PD-L1. CC'-loop, at the interface towards the ligand, colored yellow. (A) ,bonds'-representation. (B) ,cartoon'-representation.

\*Corresponding author: Wolfgang Schreiner, Department of Biosimulation and Bioinformatics, Medical University of Vienna, Austria, Tel: +431 40400 66790; E-mail: wolfgang.schreiner@meduniwien.ac.at

Received Date: 16 August, 2021; Accepted Date: 30 August, 2021; Published Date: 06 September, 2021

The software GROMACS [7,8] was run on the supercomputer at the Vienna Scientific Cluster (VSC) and took 5 weeks to compute the system's development during a real time of 200 nanoseconds.

## Refined Big Data Analysis

Advanced analysis is mandatory to extract anything meaningful from the vast amount of data. For evaluation, the software Visual Molecular Dynamics (VMD) [9] and programs coded in MATLAB [10] were used.


## Similarity and Clusters

In a first step, configurations are compared and considered similar if their multidimensional distances [11] are small. Multidimensional distance may be defined across a whole molecule or with respect to some special part, such as an alpha helix, a beta sheet or a loop. Similar configurations may be grouped into clusters [12]. In our system, the CC'-loop of PD-1 (Figure 1) proved a most relevant region for clustering.

## Clusters Relate to Function

Certain clusters regarding the configuration of the CC'-loop occur with both, the natural ligand as well as the drugs as binding partner. Other clusters occur with specific partners only. For example, one specific configuration of the CC'-loop is only seen with Pembrolizumab as ligand- it is 'specific' for this drug. Conversely, with the natural ligand, the very same loop toggles between two configurations (clusters), (Figure 2). This may represent the molecular reason why the natural ligand is able to trigger PD-1 while the drug does not – it just binds and blocks the checkpoint [13-15].

## Conclusion

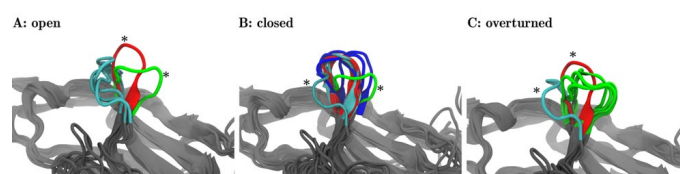

**Figure 2:** Fleur-de-CC' – Upon pembrolizumab binding the CC'-loop blooms. Depending on the binding partner, the CC'-loop assumes different conformations: 'open' (A) 'closed' (B) 'overturned' (C). Reproduced from [2].

Molecular dynamics simulation offers detailed insight into basic mechanisms of molecular medicine and is a cornerstone of in silico drug design. It reveals atomistic explanations that cannot be provided experimentally, regarding biomolecules and also drugs. Nivolumab and Pembrolizumab have already been evaluated regarding lung cancer. Modified drugs may be simulated to estimate their therapeutic potential prior to wet lab or even clinical studies. While the described article focuses on PD-1, other checkpoints and corresponding inhibitors may be tackled as well using the very same techniques opening a wide range of applications of Computational Molecular Medicine.

## References

1. Quatrini L, Mariotti FR, Munari E, Tumino N, Vacca P, et al (2020) The immune checkpoint pd-1 in natural killer cells: Expression, function and targeting in tumour immunotherapy. *Cancers (Basel)* 12(11).
2. Roither B, Oostenbrink C, Pfeiler G, Koelbl H, Schreiner W (2020) Pembrolizumab induces an unexpected conformational change in the CC'-loop of PD-1. *Cancers (Basel)*, 13(1).
3. Roither B, Oostenbrink C, Schreiner W (2020) Molecular dynamics of the immune checkpoint Programmed Cell Death Protein 1, PD-1: Conformational changes of the BC-loop upon binding of the ligand PD-L1 and the monoclonal antibody nivolumab. *BMC Bioinformatics* 21(17).
4. Burley SK (2013) PDB40: The protein data bank celebrates its 40th birthday. *Biopolymers* 99(3):165-169.
5. Oostenbrink C, Villa A, Mark AE, Van Gunsteren WF (2004) A biomolecular force field based on the free enthalpy of hydration and solvation: The GROMOS force-field parameter sets 53A5 and 53A6. *J Comput Chem*, 25(13):1656-1676.
6. Hansson T, Oostenbrink C, Van Gunsteren WF (2002) Molecular dynamics simulations. *Curr Opin Struct Biol*, 12(2):190-196.
7. Abraham MJ, Murtola T, Schulz R, Pall S, Smith JC, et al (2015) Gromacs: High performance molecular simulations through multi-level parallelism from laptops to supercomputers. *SoftwareX*, 1-2:19-25.
8. Pronk S, Páll S, Schulz R, Larsson P, Bjelkmar P, et al (2013) GROMACS 4.5: A high-throughput and highly parallel open source molecular simulation toolkit. *Bioinformatics* 2013, 29(7):845-854.
9. Humphrey W, Dalke A, Schulten K (1996) VMD: Visual molecular dynamics. *J Mol Graph* 14(1):33-38.
10. Martinez WL, Martinez AR, Solka JL (2011) *Exploratory data analysis with MATLAB*, second Edition edn. London: CRC-Press
11. Schreiner W, Karch R, Knapp B, Ilieva N (2012) Relaxation Estimation of RMSD in Molecular Dynamics Immuno-Simulations. *Comput Math Methods Med*: 173521.
12. Daura X, van Gunsteren WF, Mark AE (1999) Folding Unfolding Thermodynamics of a  $\beta$ -Heptapeptide From Equilibrium Simulations. *Proteins*, 34(3):269-280.
13. Gandhi L, Rodríguez-Abreu D, Gadgeel S, Esteban E, Felip E, et al (2018) Pembrolizumab plus Chemotherapy in Metastatic Non-Small-Cell Lung Cancer. *N Engl J Med*, 378(22):2078-2092.
14. Garon EB, Rizvi NA, Hui R, Leigh N, Balmanoukian AS, et al (2015) Pembrolizumab for the treatment of non-small-cell lung cancer. *N Engl J Med*, 372(21):2018-2028.
15. Borghaei H, Paz-Ares L, Horn L, Spigel DR, Steins M, et al (2015) Nivolumab versus Docetaxel in Advanced Nonsquamous Non-Small-Cell Lung Cancer. *N Engl J Med*, 373(17):1627-1639.


### Author Affiliations

<sup>1</sup>Department of Biosimulation and Bioinformatics, Medical University of Vienna, Austria

<sup>2</sup>Department of Molecular Modeling and Simulation, University of Natural Resources and Life Science, Austria

<sup>3</sup>Department of Obstetrics and Gynecology, Medical University of Vienna, Austria

### Submit your next manuscript and get advantages of SciTechnol submissions

- ❖ 80 Journals
- ❖ 21 Day rapid review process
- ❖ 3000 Editorial team
- ❖ 5 Million readers
- ❖ More than 5000 
- ❖ Quality and quick review processing through Editorial Manager System

SUBMIT YOUR NEXT MANUSCRIPT AT ● [WWW.SCITECHNOL.COM/SUBMISSION](http://WWW.SCITECHNOL.COM/SUBMISSION)